


30 DEGREE OFFSET AND RETURN

A	B					
<i>in.</i>	<i>in.</i>	SL1106	SL1112	SL1118	SL1136	SL1148
4 7/8	17 7/8	-	-	-	-	-
7 1/4	22	1	-	-	-	-
9 3/4	26 1/8	2	-	-	-	-
10 1/4	27 1/4	-	1	-	-	-
12 3/4	31 3/8	1	1	-	-	-
13 1/4	32 3/8	-	-	1	-	-
15 3/4	36 5/8	-	2	-	-	-
18 1/8	40 3/4	1	2	-	-	-
18 3/4	41 3/4	-	1	1	-	-
21 3/4	47	-	-	2	-	-
22 1/4	48	-	-	-	1	-
24 3/4	52 1/8	1	-	-	1	-
27 3/4	57 3/8	-	1	-	1	-
28 1/4	58 3/8	-	-	-	-	1
30 3/4	62 1/2	1	-	-	-	1
33 3/4	67 3/4	-	1	-	-	1
36 3/4	73	-	-	1	-	1
39 3/4	78 1/8	-	-	-	2	-
41 1/8	82 3/8	1	-	-	2	-
45 3/4	88 1/2	-	-	-	1	1
48 1/8	92 3/4	1	-	-	1	1
51 3/4	98 7/8	-	-	-	-	2

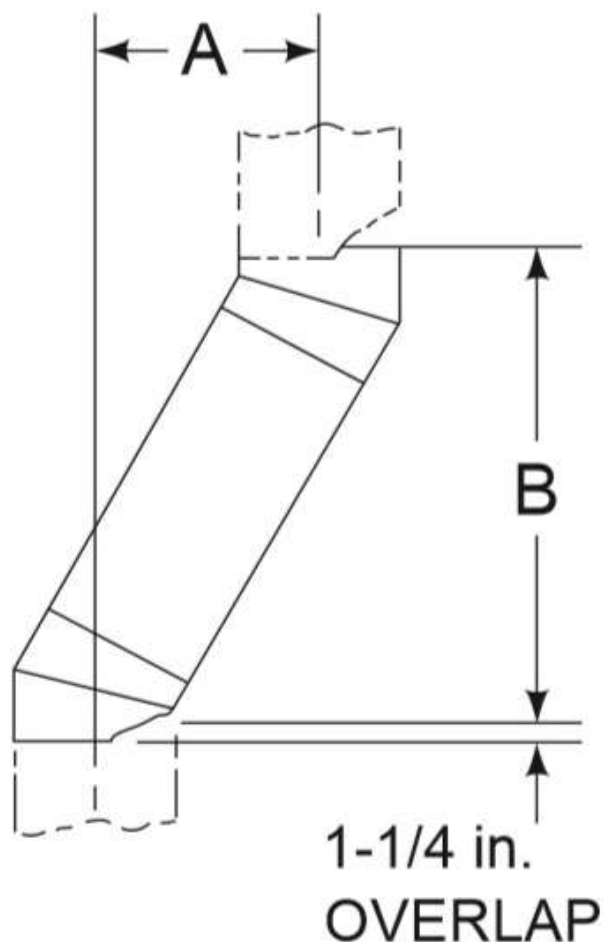

Proper assembly of air cooled chimney parts results in an overlap of chimney joints of 1-1/4 in. Effective length is built into this table.