


30 DEGREE OFFSET AND RETURN

A	B						
<i>in.</i>	<i>in.</i>	SL306	SL312	SL318	SL324	SL336	SL348
3 5/8	15 1/2	-	-	-	-	-	-
5 1/2	18 5/8	1	-	-	-	-	-
7 1/4	21 3/4	2	-	-	-	-	-
8 1/2	23 3/4	-	1	-	-	-	-
10 1/4	27	1	1	-	-	-	-
11 1/2	29	-	-	1	-	-	-
13 1/4	32 1/8	-	2	-	-	-	-
14 1/2	34 1/8	-	-	-	1	-	-
16 1/4	37 3/8	1	-	-	1	-	-
19 1/4	42 1/2	-	-	2	-	-	-
20 1/2	44 5/8	-	-	-	-	1	-
22 1/4	47 3/4	1	-	-	-	1	-
25 1/4	52 7/8	-	-	-	2	-	-
26 1/2	55	-	-	-	-	-	1
28 1/4	58 1/8	1	-	-	-	-	1
31 1/4	63 1/4	-	1	-	-	-	1
34 1/4	68 1/2	-	-	1	-	-	1
37 1/4	73 3/4	-	-	-	1	-	1
39 1/8	76 7/8	1	-	-	1	-	1
43 1/4	84 1/8	-	-	-	-	1	1
45 1/8	87 1/4	1	-	-	-	1	1
49 1/4	94 1/2	-	-	-	-	-	2

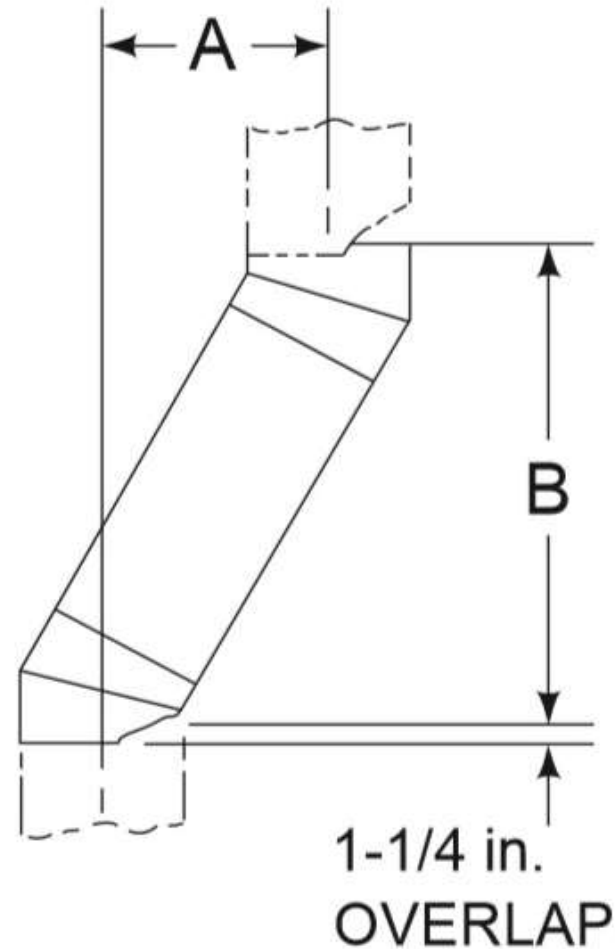

Proper assembly of air cooled chimney parts results in an overlap of chimney joints of 1-1/4 in. Effective length is built into this table.