



TECHNICAL SPECIFICATIONS		
VOLTS		120
AMPS		12.5
WATTS		1500
HIGH		1500 watts
HEATER	LOW	750 watts
NO HEATER		22 watts
	QUANTITY	LED
LAMPS	WATTS	
	TOTAL WATTS	22 watts
ROTOR MOTO	OR	1 at 5 watts
HEIGHT, WIDT	H, DEPTH	23 1/2 x 88 1/8 x 12
GLASS VIEWING OPENING		11 7/8 x 84 3/4"
SURROUND SIZE		15 7/8 x 88 1/8
SHIPPING SIZE		25 1/4 x 97 1/4 x 14 1/2
SHIPPING WE	IGHT	197 lbs
	UNIT	
	GLASS FRONT	Included
PLUG LOCAT	ION	Left Side
CORD LENGTH		76''
APPROX. HEATING AREA		400 sq ft

1			
	• •	• •	· · ·



SERIES BUILT IN	MODEL BI-88-DEEP	© US	REV 1
SCALE 1" = 1'-0"	DATE: 11/1/2014	SHEET 1 OF 1	

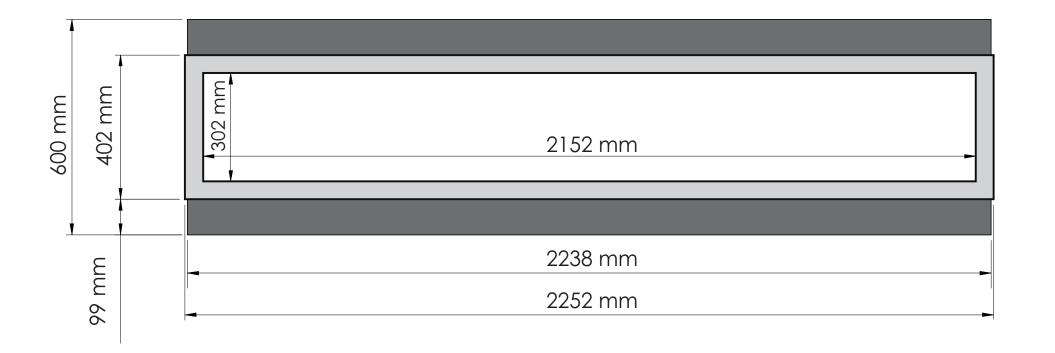



TECHNICAL SPECIFICATIONS			
VOLTS		120	
AMPS		12.5	
WATTS		1500	
LIEATED	HIGH	1500 watts	
HEATER	LOW	750 watts	
NO HEATER		22 watts	
	QUANTITY	LED	
LAMPS	WATTS		
	TOTAL WATTS	22 watts	
ROTOR MOTO	R	1 at 5 watts	
HEIGHT, WIDTH, DEPTH		60 x 223.8 x 30.2 cm	
GLASS VIEWING OPENING		30.2 x 215.2 cm	
SURROUND SIZE		40.2 x 225.2 cm	
SHIPPING SIZE		64 x 246.7 x 36.8	
SHIPPING WEIGHT		89 kg	
	UNIT		
	GLASS FRONT	Included	
PLUG LOCATION	NC	Left Side	
CORD LENGTH		193 cm	
APPROX. HEATING AREA		37 sqm	

 	• •



SERIES BUILT IN	MODEL BI-88-DEEP	© US	REV 1
SCALE 1:12	DATE: 11/1/2014	SHEET 1 OF 1	