

LINTEL BAR

Models:

**7100, C40, NORTHSTAR, PIONEER II, PIONEER III, C40-C, NORTHSTAR-C,
WARMMAJIC-II, PIONEER-II-C**

These have been tested for use with specific Hearth & Home Technologies products. Check with your local building code agency before you begin installation to ensure compliance with local codes, including the need for permits and follow-up inspections. If you encounter any problems regarding code approvals, or if you need clarification of any of the instructions contained here, contact your Hearth & Home Technologies dealer. For the dealer nearest you, please visit www.hearthnhome.com.

The lintel bar is used to support the brick or stone being laid across the top opening of the fireplace.

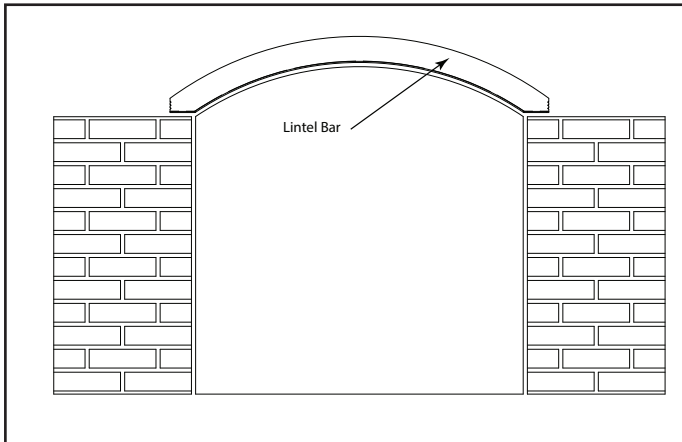


Figure 1

Installation

1. Attach the template or the front to the fireplace. See Installation Manual.
2. Layup both sides with brick or rock to the top corners of the template/front, making sure both sides are level across them.
3. Place the lintel across the top of the template/front, resting on each side of the brick/rock wall. **NOTE:** If using the face, allow 1/8 inch gap between the top of the front and the bottom of the lintel. See Figure 1. This gap is built into the template.
4. Continue laying up the wall following the contour of the lintel.