



## TI3T-1 & TI3TN-1 Timberwolf Traditional Woodburning Insert




TI3T-1 Traditional Wood Insert

### KEY SERIES FEATURES

- Up to 55,000 BTU's
- 1.8 cu. ft. firebox capacity
- Weighted average emissions rate: 1.21 g/hr.
- Weighted average overall efficiency: 71.6%
- Largest ceramic glass viewing area in the industry
- Full refractory lined firebox
- Effective air wash
- Tested and certified to EPA 2020 cord wood requirements
- Minimum fireplace opening: 28"W x 22"H x 18"D
- Dual blower system included
- Flue Size: 6"

The Timberwolf TI3T and TI3TN feature a traditional flush front with a cast iron surround. Four stainless steel secondary air tubes supercharge the fuel burning process and generate a beautiful display of yellow flames. Complete with a removable painted black log retainer and a heat circulating blower, the Timberwolf TI3T and TI3TN units are the perfect heating solution to replace and update drafty masonry fireplaces in a home or cottage.

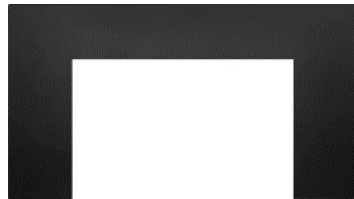

BP3 - For Placement Between Surround and Wall



Dual Blower Included



Removable Log Retainer



TI3TN-1 Traditional Wood Insert

Self-contained and more efficient than an existing woodburning fireplace opening, a woodburning insert is a great way to ensure that your home is running more productively. Venting out the existing chimney, woodburning inserts ensure that drafts can no longer enter your home. These inserts are built to exceed standards for clean-burning which ensures loads of even heat and comfort for hours on end. Whether you go with a contemporary, clean-lined look or something a little more on the traditional side, there is nothing compared to the joy and scent of building your own wood-burning fire in a woodburning insert.